

INDOOR

D SERIES

- Die-cast Aluminum Housing
- Copper Power Cables
- High Refresh Rate
- PWM Driver Chips



PRODUCT SPECIFICATION	D 1.25	D 1.53	D 1.86	D 2	D 2.5	D 3	D 4
Pixel Pitch(mm)	1.25	1.538	1.86	2	2.5	3.076	4
Scan Mode(s)	32	64	52	43	32	26	20
Module Size(mm)	320×160						
Module Resolution(Dots)	256×128	208×104	172×86	160×80	128×64	104×52	80×40
Cabinet Size(mm)	640×480						
Brightness(cd/m ²)	550	600	550	550	600	450	600
Refresh Rate(Hz)	3840 / 7680			1920 / 3840 / 7680			

INDOOR

ATS SERIES

- Superior Protection
- Easy to Install And Maintain
- Power-efficient
- Integrated Design



PRODUCT SPECIFICATION	ATS 1.86	ATS 2.0	ATS 2.5
Pixel Pitch(mm)	1.86	2	2.5
Scan Mode(s)	43	40	32
Module Size(mm)	336×384	384×384	320×384
Module Resolution(Dots)	288906	250000	160000
Cabinet Size(mm)	2560×960 / 1920×960		
Brightness(cd/m ²)	500-550		
Refresh Rate(Hz)	3840 / 7680		

OUTDOOR

D SERIES

- Stable Performance
- Copper Power Cables
- High Refresh Rate
- PWM Driver Chips



PRODUCT SPECIFICATION	D 2.6	D 3	D 4	D 5	D 6	D 8	D 10
Pixel Pitch(mm)	2.5	3.076	4	5	6.667	8	10
Scan Mode(s)	16	13	10	8	6	5	2
Module Size(mm)	320×160						
Module Resolution(Dots)	128×64	104×52	80×40	64×32	48×24	40×20	32×16
Cabinet Size(mm)	960×960						
Brightness(cd/m ²)	4000-4500						
Refresh Rate(Hz)	1920 / 3840 / 7680						

TS SERIES

Translucency screen

- Thin Design
- High Brightness
- High Reliable
- Highlight Transmittance



PRODUCT SPECIFICATION	INDOOR			OUTDOOR	
	TS2.5-6.6	TS3.9-9.9	TS3.8-7.8	TS3.9-9.9	TS3.9-7.8
Pixel Pitch(mm)	2.6-5.6	3.9-9.9	3.9-7.8	3.9-9.9	3.9-7.8
Light Transmittance(%)	60	50	50	55	65
Module Size(mm)	500×125			500×125	
Module Resolution(Dots)	178×22	128×32	128×16	128×32	128×16
Cabinet Size(mm)	1000×1000			1000×1000	
Brightness(cd/m²)	500-1500-3000			3000-4000	
Refresh Rate(Hz)	1920 / 3840 / 7680				



RELIABLE & DURABLE

Built to perform in any indoor/outdoor environment.



EASY INSTALLATION

Quick setup with low maintenance.



ENERGY EFFICIENT

Consumes less power, delivers more.



PREMIUM DESIGN

Sleek and integrated for a professional look.

INDOOR

ATS SERIES

INDOOR LED SERIES



Superior Protection

Engineered for durability and long-lasting performance.



Easy to Install And Maintain

User-friendly design for quick installation and hassle-free maintenance.



Power-efficient

Optimized for lower power consumption without compromising brightness.



Integrated Design

Sleek, seamless design for a modern and professional look.



PRODUCT SPECIFICATION

SPECIFICATION	ATS 1.86	ATS 2.0	ATS 2.5
Pixel Pitch(mm)	1.86	2	2.5
Scan Mode(s)	43	40	32
Module Size(mm)	336×384	384×384	320×384
Module Resolution(Dots)	288906	250000	160000
Cabinet Size(mm)	2560×960 / 1920×960		
Brightness(cd/m ²)	500-550		



RELIABLE & DURABLE

Built to perform in any indoor environment.



EASY INSTALLATION

Quick setup with low maintenance.



ENERGY EFFICIENT

Consumes less power, delivers more.



PREMIUM DESIGN

Sleek and integrated for a professional look.

TS SERIES

Translucency screen



Thin Design

Sleek and lightweight for seamless integration.



High Brightness

Vibrant display with excellent visibility in any lighting.



High Reliable

Built with premium components for stable and durable performance.



High Light Transmittance

High transparency for unobstructed views and natural light flow.

PRODUCT SPECIFICATION

PRODUCT SPECIFICATION	INDOOR			OUTDOOR	
	TS2.5-6.6	TS3.9-9.9	TS3.9-7.8	TS3.9-9.9	TS3.9-7.8
Pixel Pitch(mm)	2.6-5.6	3.9-9.9	3.9-7.8	3.9-9.9	3.9-7.8
Light Transmittance(%)	60	50	50	55	65
Module Size(mm)	500×125			500×125	
Module Resolution(Dots)	178×22	128×32	128×16	128×32	128×16
Cabinet Size(mm)	1000×1000			1000×1000	
Brightness(cd/m²)	500-1500-3000			3000-4000	
Refresh Rate(Hz)	1920 / 3840 / 7680				



RELIABLE & DURABLE

Built to perform in any environment.



EASY INSTALLATION

Quick setup with low maintenance.



ENERGY EFFICIENT

Consumes less power, delivers more.



PREMIUM DESIGN

Sleek and integrated for a professional look.

HOLOGRAPHIC SCREEN SERIES

LEADING THE VISUAL REVOLUTION

High-quality image of the Holographic screen applied to glass, displaying dynamic content with a tech-modern feel.

MAIN FEATURE



Ultra-high Transparency:
No splicing structure,
full screen transparent invisible



High Display Quality:
Grayscale 16 bit, stable image
and delicate colors



Multiple Pixel Pitch:
P2.5, P3.91, P6.25, P10
Meet various display needs



Easy installation:
Any size, bendable,
adapts to any glass surface



APPLICATION SCENARIOS

- Commercial Windows
- Auto Shows & Stages
- Airports & High-Speed Rail Stations
- Glass Facades
- Retail Flagship Stores



PRODUCT SPECIFICATION

PRODUCT SPECIFICATION	INDOOR			OUTDOOR	
	TS2.5-6.6	TS3.9-9.9	TS3.9-7.8	TS3.9-9.9	TS3.9-7.8
Pixel Pitch(mm)	2.6-5.6	3.9-9.9	3.9-7.8	3.9-9.9	3.9-7.8
Light Transmittance(%)	60	50	50	55	65
Module Size(mm)		500×125		500×125	
Module Resolution(Dots)	178×22	128×32	128×16	128×32	128×16
Cabinet Size(mm)		1000×1000		1000×1000	
Brightness(cd/m²)		500-1500-3000		3000-4000	
Refresh Rate(Hz)		1920 / 3840 / 7680			



RELIABLE & DURABLE
Built to perform in any
environment.



EASY INSTALLATION
Quick setup with low
maintenance.



ENERGY EFFICIENT
Consumes less power,
delivers more.



PREMIUM DESIGN
Sleek and integrated for
a professional look.



Annstechs
LED + DIGITAL + GREEN
"Your Visualization Our Innovation"

LIGHT UP EVERY BEAT

LED PODIUM

Engineered for impact. Built for the stage.
Designed to elevate every performance.



HIGH-RESOLUTION LED DISPLAY

Vibrant visuals that
command attention.



RUGGED & RELIABLE BUILD

Built to perform in
any environment.



PLUG & PLAY READY

Easy setup for
seamless shows.



STABLE & SECURE DESIGN

Engineered for safety
and durability.



CUSTOMIZABLE CONTENT

Show your brand.
Your way.



Annstechs
LED + DIGITAL + GREEN

YOUR VISION.
OUR TECHNOLOGY.
ENDLESS IMPACT.



www.annstechs.com



digital@annstechs.com



+91 98201 93497

PRODUCT LINE




LED Die Bonder



Plasma Cleaning Machine



Welding Wire Machine

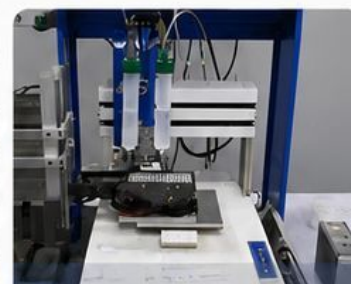


Dispenser




Oven



Surface Inspection & Stripping

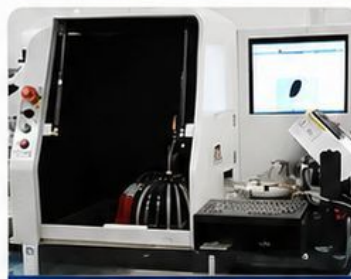

Crystal Spectrometer

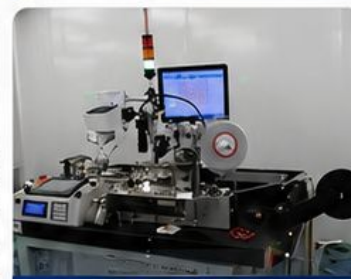

Taping Machine



SMT Moulder



Test of intermediates



Soldering



Aging Test



Stick Adhesive



Inspection & Package



Ready for delivery